

SPECIFICATIONS


Size	Metric	British
Max. Working Height A	32m	105ft
Max. Platform Height B	30m	98ft 5in
Overall Length C	6.73m	22ft 1in
Overall Width D	2.55m	8ft 4in
Overall Height(Rails Up) E	4.13m	13ft 7in
Overall Height(Rails Down) F	3.19m	10ft 6in
Platform Size(Length×Width)	6.20m×2.45m	20ft 4.1in×8ft
Platform Extension Size G	2.1m	6ft 11in
Ground Clearance(Stowed/Raised)	0.2m	8in
Wheelbase H	4.86m	15ft 11in
Turning Radius(Inside/Outside)	3.8m/6.3m	12ft 6in/20ft 8in
Tyres	15-625	15-625

Performance		
S.W.L	1000kg	2204lb
S.W.L On Extension	1000kg	2204lb
Max. Occupants	4	4
Gradeability	30%	30%
Travel Speed(Stowed)	3.5km/h	3.5km/h
Travel Speed(Raised)	0.3km/h	0.3km/h
Max. Working Slope	2°/3°	2°/3°
Up/Down Speed	160/120sec	160/120sec

Weight		
Overall Weight	23900kg	52690lb

Power		
Hydraulic Tank	260L	260L
Battery	80V520Ah	80V520Ah
Charger	80V/80A	80V/80A
Driving Motor	4×48V/2.4kW	4×48V/2.4kW
Lifting Motor	53V/28kW	53V/28kW

* The platform height plus 2m (7ft in British standard) is the working height.
Standards Compliance

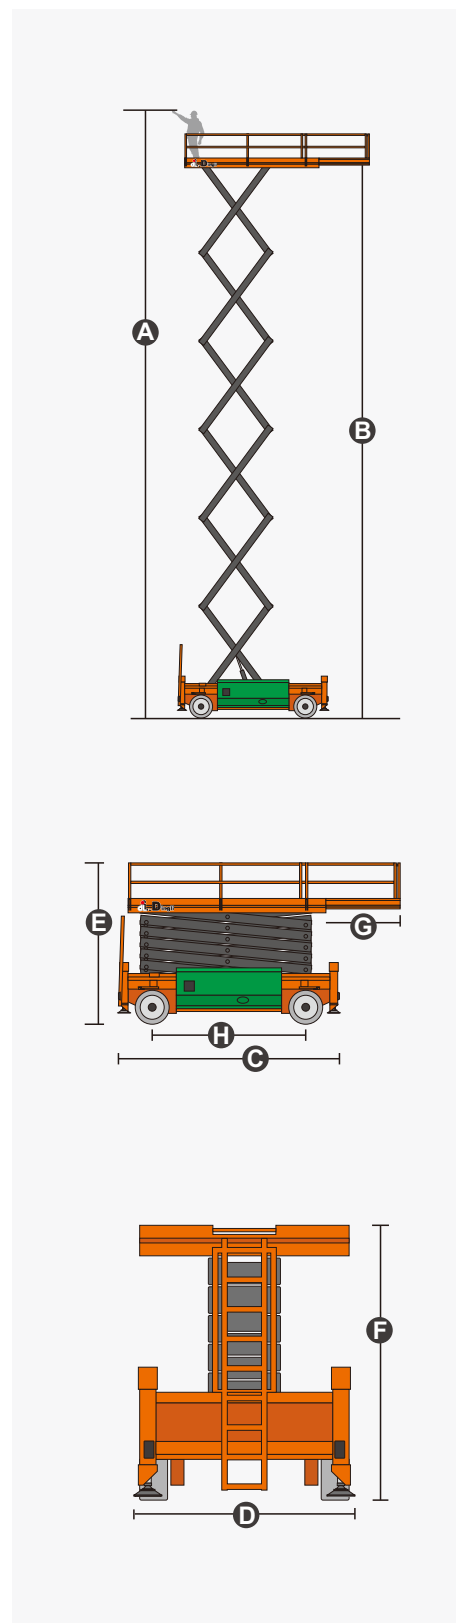

FEATURES

Standard Items

- Proportional Joystick Controls
- Self-Locking Gates
- Charging Indicator
- 4×4 Drive
- 4×4 Steer
- Four-Wheel Braking
- Self-Weight Lowering System
- Tubing Explosion-Proof System
- Onboard Fault Diagnostic System
- Tilt Alarm
- Motion Alarm
- Horn
- Hour Meter
- Charging Protection System
- Flashing LED Beacon
- Foldable Guard Rails
- Drive Enable
- Automatic One-Way Platform Extension Deck
- Manual Brake Release
- Lanyard Attachment Point
- Tie-Down And Lifting Points
- Automatic Leveling Hydraulic Outriggers
- Emergency Pump
- Emergency Stop Button
- Platform Load Sense System
- Drivable At Full Height

Optional Items

Factory Tyres

- Foam-Filled Tyres **
- Non-Marking Tyres

Factory Hydraulic Oil

- No. 46 Hydraulic Oil (Mineral Oil)**

Additional Items

- GPS Unit
- Biodegradable Hydraulic Oil
- AC Power Cord to Platform
- Air Line to Platform
- Work Light Package
- Footpedal Switch
- Anti-Collision Bar on Platform
- Visual Spirit Level
- Outrigger Pad Package
- Guard Mesh Package
- Self-Lubrication System

** Factory Default, If You Have Other Needs, Please Inform Dingli Regional Sales.

ZHEJIANG DINGLI MACHINERY CO., LTD.

No.188 Qihang Road,Deqing,Zhejiang P.R.China 313219

Telephone +86(572)8681688

Fax +86(572)8681960

E-Mail export@cndingli.com

[Http://www.cndingli.com](http://www.cndingli.com)

